

# A comparison of the HYDRUS (2D/3D) and SALTMED models to investigate the influence of various water-saving irrigation strategies on the maize water footprint

Fatemeh Karandish<sup>a,\*</sup>, Jiří Šimůnek<sup>b</sup>

<sup>a</sup> Water Engineering Department, University of Zabol, Zabol, Iran

<sup>b</sup> Department of Environmental Sciences, University of California Riverside, Riverside, CA 92521, USA

## ARTICLE INFO

### Keywords:

Crop growth  
Water consumption  
Water footprint  
Consumptive WF  
Degradative WF  
Deficit irrigation  
Partial root-zone drying

## ABSTRACT

In this comparative research, we applied the HYDRUS (2D/3D) and SALTMED models to investigate the influence of various water-saving irrigation strategies on maize water footprints (WFs). The models were first calibrated and validated based on data collected in a two-year field investigation under five water-saving irrigation treatments: full irrigation (FI), partial root-zone drying at water deficit levels of 55% (PRD<sub>55</sub>) and 75% (PRD<sub>75</sub>), and deficit irrigation at the same levels (DI<sub>55</sub> and DI<sub>75</sub>). While the SALTMED model performed well when simulating crop growth parameters, with absolute relative error (IREI) of 3.5–12%, the HYDRUS (2D/3D) model was more accurate when simulating soil water and solute transport, with the normalized values of the root mean square error (nRMSEs, 6.7–31.8%) and the mean bias error (nMBEs, 7.7–34.3%) lower than by SALTMED. This better performance of HYDRUS (2D/3D) resulted in 0.6–3.0% and 5.3–30.2% lower values of estimated consumptive and degradative WFs, respectively, compared to values estimated by SALTMED. While no considerable differences were observed among various irrigation treatments regarding their consumptive WFs for the maize production, PRD<sub>75</sub> may represent a safer option under the water crisis, since its grey WF was 17.1–77.2% lower than those estimated for the other water-saving irrigation treatments. This WF reduction was accompanied by an insignificant reduction in crop yield and improved N uptake. Based on our results, while HYDRUS (2D/3D) provides more reliable results, both the HYDRUS (2D/3D) and SALTMED models may be applied for the evaluation of new targets implemented for achieving sustainable agriculture in water-scarce regions.

## 1. Introduction

Water and agricultural authorities indicate that the scarcity of fresh water is a major worldwide concern (Karandish and Šimůnek, 2017) which threatens food security. Irrigated agriculture increased rapidly throughout the world to satisfy the increasing demand for food (Yao et al., 2017). In many countries, agriculture is the biggest fresh water user, accounting for over 90% of diverted water. According to the Food and Agriculture Organization (FAO) of the United Nations (AQUASTAT, 2016), in Iran in 2004, nearly 68% of total renewable water resources were used, of which 92.2% was allocated to the agricultural sector, while the municipal and industrial sectors consumed only 6.6% and 1.2%, respectively (AQUASTAT, 2016). Therefore, efficient water management in the agricultural sector may represent the main source of fresh water across the country.

Adapting water-saving irrigation strategies such as deficit irrigation

(DI) or partial root zone drying (PRD), in which crops receive less irrigation water during their growing season (Karandish and Šimůnek, 2016a), may be a rational decision to cope with fresh water scarcity. Many researchers have investigated economic and environmental consequences of applying DI (Stone, 2003; Klocke et al., 2004; Payero et al., 2006) or PRD (Dry et al., 2000; Kang and Zhang, 2004; Kirda et al., 2004; Tang et al., 2005; Shao et al., 2008; Karandish and Šimůnek, 2016a,b). They mostly concluded that while significant economic losses may be expected for agricultural crops under DI, PRD may produce water savings without a significant decrease in yields.

Various indicators have been developed over the past decades to address the profitability of new water-saving irrigation strategies. Among these, the water footprint (WF) index is known as the most comprehensive indicator. The WF is a multi-dimensional index of human appropriation of freshwater resources, which could facilitate a proper assessment of patterns of consumption, production, and trade as

\* Corresponding author.

E-mail addresses: [F.Karandish@uoz.ac.ir](mailto:F.Karandish@uoz.ac.ir), [Karandish\\_h@yahoo.com](mailto:Karandish_h@yahoo.com) (F. Karandish).

a function of water consumption (Hoekstra et al., 2011; Hoekstra, 2013, 2017). One of the most highlighted advantages of the WF index is that it is possible to apply it for evaluating such appropriation at various spatial (i.e., for example, at the field, basin, national, or even global scale) and temporal scales. Such assessment may be carried out for an individual process, or for a number of processes, involved in the production and/or consumption of a product.

Previous researchers have mainly focused on the WF assessment at the national or global scales (e.g., Chukalla et al., 2017, 2018; Karandish and Hoekstra, 2017; Lee et al., 2017; Zhuo et al., 2016a,b; Yoo et al., 2016a, b; Chukalla et al., 2015; Mekonnen and Hoekstra, 2014, 2015, 2016; Hoekstra, 2013), while its field-scale application has received less attention. Additionally, only few researchers have estimated the WF related to the crop production based on data collected during field experiments, although it is expected that such assessment would produce more realistic results.

Since field experiments are very time consuming and expensive, a large number of the mathematical/conceptual models for simulating soil-water-crop relationships have been developed that can, after proper validation, be used in scenario assessment. The modeling approach, although considered to be a useful alternative to field investigations, always involves uncertainties, the range of which depends on many factors, including embedded governing equations and formulas for estimating target parameters. Hence, employing the best available model may produce more reliable results for the policy makers when developing new targets for achieving sustainable agriculture. While there are numerous crop-growth simulation models, only a few of them are suitable to simulate PRD conditions. Among these, the SALTMED model of Ragab et al. (2005) has proven to be highly accurate (Ragab et al., 2005; Pulvento et al., 2013; Ragab et al., 2015; Ragab, 2015; Pulvento et al., 2015a; Hassanli et al., 2016; Afzal et al., 2016; Abdelraouf and Ragab, 2018). Additionally, Karandish and Šimůnek (2016a,b, 2017) demonstrated that soil water and solute dynamics under PRD conditions is very well captured also by the HYDRUS model (Šimůnek et al., 2008, 2016).

Hence, in the current research, we carried out a comparative analysis to address the following objectives: (i) to evaluate the performance of the SALTMED model for simulating soil-water-crop relationships under various water-saving irrigation strategies, (ii) to compare the maize consumptive and degradative water footprints estimated using HYDRUS (2D/3D) and SALTMED, and finally, (iii) to propose the most appropriate water-saving irrigation strategy for the maize production in Iran while both water and environmental issues are taken in consideration.

## 2. Materials and methods

### 2.1. Field experiment

Filed data were collected during a two-year experiment (2010 and 2011) in an 825 m<sup>2</sup> (15 × 55 m) maize field at the Sari Agricultural Sciences and Natural Resources University (SANRU: 36.3° N, 53.04° E; 15 m below sea level). Sandy clay loam and clay loam textures were observed in the 0–20 and 20–100 cm soil depths, respectively. Daily weather data were recorded at the weather station near the experimental field. The field trial was carried out using a complete block design. Irrigation treatments consisted of full irrigation (FI), two partial root-zone drying (PRD) treatments (PRD<sub>75</sub> and PRD<sub>55</sub>), and two deficit irrigation (DI) treatments (DI<sub>75</sub> and DI<sub>55</sub>) in three replicates. Each treatment occupied a total area of 165 m<sup>2</sup> (15 × 11 m), and each replicate of a specific treatment occupied an area of 55 m<sup>2</sup> (5 × 11 m). Before sowing, soil samples were collected every 20 cm down to the 80 cm soil depth for the analysis of soil chemical and physical properties. The field was then equipped with a surface drip irrigation system. Having emitters 20 cm apart and an emitter discharge rate of 2 L hr<sup>-1</sup>, drip lines were placed on the soil surface 75 cm apart (Fig. 1).

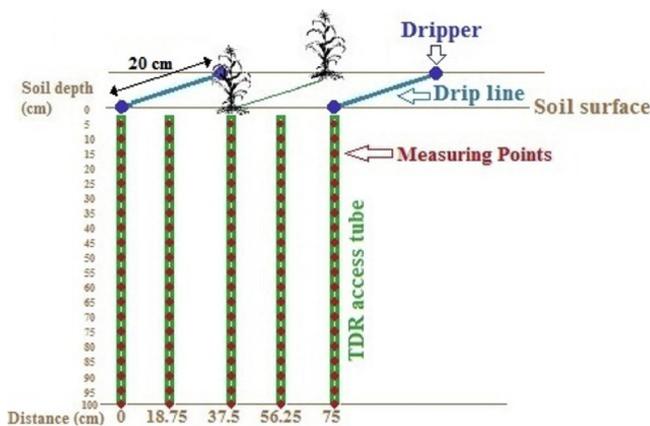


Fig. 1. Horizontal locations of laterals, drippers, and plants in the experimental field, and vertical locations of TDR probes in the maize root zone. A rectangular domain of 75 × 80 cm was considered in the HYDRUS and SALTMED models since the maximum rooting depth was measured to be 80 cm during both cropping cycles.

Thereafter, five 100 cm long TDR probes (Trime FM; IMKO; Germany) were installed in each treatment (i.e., 25 TDR probes were installed in the study area; 5 probes × 5 treatments) for continuous monitoring of the soil water content (SWC) during both growing seasons.

Fig. 1.

With a 75 × 20 cm crop row and crop spacing, maize single-cross hybrid 704 was sown 5 cm deep, between and parallel to drip lines, on May 26 both in 2010 and 2011. On May 26 in 2010 and 2011, 150 kg ha<sup>-1</sup> triple superphosphate was applied to the field. On June 12, 2010 and June 5, 2011, 65 kg ha<sup>-1</sup> urea and 50 kg ha<sup>-1</sup> potassium sulfate were applied via irrigation water (fertigation). In addition, these fertilizers were also applied on July 19, 2010 and July 9, 2011, at rates of 135 kg ha<sup>-1</sup> and 100 kg ha<sup>-1</sup> for urea and potassium sulfate, respectively.

Maize was irrigated using the surface drip irrigation system every other day. The irrigation water quality was measured weekly; the electrical conductivity of irrigation water ( $EC_{iw}$ ) was in the range of 0.8–1.5 dS m<sup>-1</sup>, with averages of 1 dS m<sup>-1</sup> and 1.1 dS m<sup>-1</sup> during the entire cropping cycles of 2010 and 2011, respectively.

For each irrigation event, the irrigation water depth for the FI treatment was calculated as follows:

$$[I_n]_{FI} = \sum_{i=1}^m \{[\theta_{FCi}] - (\theta_{BFI})_{FI}\} D_i \quad (1)$$

where  $[I_n]_{FI}$  is the net irrigation depth (mm) of the  $n$ th irrigation event for the FI treatment,  $\theta_{FCi}$  is the volumetric SWC at field capacity (FC, cm<sup>3</sup> cm<sup>-3</sup>) of the  $i$ th soil layer,  $(\theta_{BFI})_{FI}$  is the volumetric SWC of the  $i$ th soil layer before irrigation (cm<sup>3</sup> cm<sup>-3</sup>) in the FI treatment,  $D_i$  is the soil layer thickness (mm),  $i$  is the soil layer, and  $m$  refers to the number of soil layers down to a specific soil depth, for which  $[I_n]_{FI}$  is calculated.

All treatments received the same amount of irrigation water during the first 55 days after sowing (DAS) in 2010 and during 45 DAS in 2011. Irrigation treatments were implemented during 55–107 DAS in 2010 and during 45–110 DAS in 2011, during which the PRD<sub>55</sub> and DI<sub>55</sub> treatments received 55% of the FI treatment's irrigation amount at each irrigation event, while the PRD<sub>75</sub> and DI<sub>75</sub> treatments receive 75%. While in the FI and DI treatments, both drip lines were operated simultaneously, in the PRD treatments during the PRD period, to ensure partial root-zone drying, just one of the drip lines was operated while the other one was not during each irrigation event. Only half of the root zone was thus irrigated during the PRD period, while irrigation shifted between the two sides of the plants each week.

Prior to the onset of the irrigation treatments (i.e., on 55 DAS in 2010 and 45 DAS in 2011) and then once a week (i.e., on 60, 66, 72, 78, 84, 90, 96, 102, and 106 DAS in 2010 and 52, 58, 64, 70, 76, 82, 88, 94,

100, 106, and 110 DAS in 2011), soil samples were collected every 20 cm vertically to a depth of 80 cm and at five equal horizontal distances between two drip lines for each treatment. Soil samples were analyzed for their total nitrogen (TN) and NO<sub>3</sub><sup>-</sup>-N concentrations. At the same dates, three crops per plot (i.e., each plot is considered as one replicate of a treatment) were harvested for determining total crop N uptake, total wet and dry biomass, and the leaf area index (LAI). All considered soil and crop properties, as well as maize grain yield, were also determined at harvest (107 DAS in 2010 and 110 DAS in 2011). A detailed description of various measurements is provided in Karandish and Šimůnek (2018).

Soil physical properties, including soil texture, volumetric soil water contents at field capacity, a permanent wilting point, sand, silt, and clay contents, soil organic matter, and initial soil water and soil salinity contents were measured at soil samples collected during the growing season. Retention curves were measured for two soil horizons. For this purpose, soil samples were taken for each treatment in three replicates every 20 cm to a depth of 80 cm before crop sowing using a 2-in ID augur. SWCs at 11 different pressure heads were measured in the laboratory at each sample using a pressure plate apparatus. The van Genuchten (1980) model parameters were then fitted to observed retention data.

## 2.2. The SALTMed model

### 2.2.1. Model description

The SALTMed model (Ragab, 2015) is a physically based holistic model, which includes the following key processes: evapotranspiration, crop water uptake, water and solute transport under different initial and boundary conditions, drainage, and the relationship between crop yield and water uptake (Ragab et al., 2005; Ragab, 2015).

Potential evapotranspiration is estimated using the FAO-Penman-Monteith equation (Allen et al., 1998):

$$ET_0 = \frac{0.408(R_n - G) + \gamma \left( \frac{900}{T + 273} \right) \times U_2 \times (e_s - e_a)}{\Delta + \gamma(1 + 0.34U_2)} \quad (2)$$

where  $\Delta$  is the slope of the vapor pressure curve (kPa °C<sup>-1</sup>),  $R_n$  is the net radiation at the crop surface (MJ m<sup>-2</sup> d<sup>-1</sup>),  $\gamma$  is the psychrometric constant (kPa °C<sup>-1</sup>),  $T$  is the average air temperature (°C),  $U_2$  is the average wind speed (m s<sup>-1</sup>) at a 2-m height,  $G$  is the soil heat flux density (MJ m<sup>-2</sup> d<sup>-1</sup>),  $e_s$  is the saturation vapor pressure (kPa), and  $e_a$  is the actual vapor pressure (kPa).

Based on calculated  $ET_0$ , crop evapotranspiration ( $ET_c$ , mm) is then calculated as follows (Allen et al., 1998):

$$ET_c = (K_{cb} + K_e) \times ET_0 \quad (3)$$

where  $K_{cb}$  is the basal crop coefficient and  $K_e$  is the evaporation coefficient (Allen et al., 1998). The product  $K_{cb} \times ET_0$  represents crop transpiration and  $K_e \times ET_0$  bare soil evaporation. The crop coefficient is then defined as  $K_c = K_{cb} + K_e$ .

Actual root water uptake is then estimated using the approach developed by Cardon and Letey (1992), who determined root water uptake ( $S(z,t)$ , mm d<sup>-1</sup>) as:

$$\left\{ \begin{aligned} S(z, t) &= \left[ \frac{S_{max}(t)}{1 + \left( \frac{a(t)h + \pi}{\pi_{50}(t)} \right)^3} \right] \lambda(z, t) \\ \lambda(z) &= \begin{cases} 5/3L \text{ for } z \leq 0.2L \\ \frac{25}{12L} \times \left( 1 - \frac{z}{L} \right) \text{ for } 0.2L < z \leq L \\ 0.0 \text{ for } z > L \end{cases} \end{aligned} \right. \quad (4)$$

where  $S_{max}(t)$  is maximum potential root water uptake at time  $t$  and depth  $z$ ,  $z$  is the vertical depth,  $\lambda(z, t)$  is the depth-time dependent fraction of the total root mass,  $L$  is the maximum rooting depth,  $\pi$  is the osmotic pressure head,  $h$  is the matric pressure head,  $\pi_{50}(t)$  is the

osmotic pressure head for which  $S_{max}(t)$  is reduced by half, and  $a(t)$  is a weighting coefficient, which accounts for differential responses of a crop to matric and osmotic stresses, which may be defined as  $\frac{\pi_{50}(t)}{h_{50}(t)}$ , where  $h_{50}(t)$  is the matric pressure head for which  $S_{max}(t)$  is reduced by half.

There are two options in the SALTMed model for simulating crop yield. One can calculate crop yield either using the relative yield index (RY) or more precisely using the crop growth status. In the second approach, which was employed in our study, crop yield is obtained by calculating the daily biomass production ( $\Delta q$ ) and the harvest index (HI) (Exkersten and Jansson, 1991). On a daily scale, the  $\Delta q$  is calculated as follows:

$$\left\{ \begin{aligned} \Delta q &= NA \\ NA &= A - R \\ A &= E \times I \times f(Temp) \times f(T) \times f(Leaf - N) \\ I &= R_s (1 - e^{-k \times LAI}) \end{aligned} \right. \quad (5)$$

where  $\Delta q$  is increased crop biomass,  $NA$  is the net assimilation rate,  $A$  is the assimilation rate,  $R$  is the respiration loss,  $E$  is the photosynthesis efficiency (g dry matter MJ<sup>-1</sup>),  $I$  is the radiation input,  $R_s$  is solar radiation (MJ m<sup>-2</sup> d<sup>-1</sup>),  $k$  is the extinction coefficient ( $k \cong 0.6$ ),  $LAI$  is the leaf area index, and  $f(temp)$ ,  $f(T)$ , and  $f(Leaf-N)$  are stress factors related to heat stress, transpiration stress, and leaf N content, respectively. Based on daily calculated  $\Delta q$ , the AY at the end of the growing season, subject to existing stresses (i.e., salinity, water, or nutrient stresses), can then be calculated as follows:

$$AY = \sum_{\text{whole cropping cycle}} \Delta q \times HI \quad (6)$$

The Richards equation is used in the SALTMed model for simulating two-dimensional water flow in the soil, while the nutrient transport is simulated using the diffusion-dispersion-convection equation (Hillel, 1977):

$$\frac{\partial \theta}{\partial t} = \frac{\partial}{\partial x} \left( K_x \frac{\partial h}{\partial x} \right) + \frac{\partial}{\partial z} \left( K_z \frac{\partial h}{\partial z} \right) - \frac{\partial k}{\partial z} - S_w \quad (7)$$

$$\frac{\partial \theta c}{\partial t} = \left\{ \frac{\partial}{\partial x} \left( \theta D_{xx} \frac{\partial c}{\partial x} + \theta D_{xz} \frac{\partial c}{\partial z} \right) + \frac{\partial}{\partial z} \left( \theta D_{zz} \frac{\partial c}{\partial z} + \theta D_{zx} \frac{\partial c}{\partial x} \right) \right\} - \left( \frac{\partial q_x c}{\partial x} + \frac{\partial q_z c}{\partial z} \right) - S_c \quad (8)$$

where  $\theta$  is the volumetric SWC (L<sup>3</sup>L<sup>-3</sup>),  $K$  is the unsaturated hydraulic conductivity function (LT<sup>-1</sup>),  $h$  is the soil water pressure head (L),  $x$  is the lateral coordinate,  $z$  is the vertical coordinate (positive downwards),  $t$  is time (T),  $S_w$  denotes root water uptake (T<sup>-1</sup>),  $c$  is the solute concentration in the liquid phase (ML<sup>-3</sup>),  $q_x$  and  $q_z$  are the components of the volumetric flux density (LT<sup>-1</sup>),  $D_{xx}$ ,  $D_{zz}$ , and  $D_{xz}$  are the components of the dispersion tensor (L<sup>2</sup>T<sup>-1</sup>), and  $S_c$  is the sink term (nutrient uptake, ML<sup>-3</sup>T<sup>-1</sup>).

The soil hydraulic properties (i.e., the  $\theta - h$  and  $\theta - K$  relationships) are in the SALTMed model described using the analytical functions of van Genuchten (1980):

$$\left\{ \begin{aligned} \theta(h) &= \theta_r + \left[ \frac{(\theta_s - \theta_r)}{(1 + |\alpha h|^n)^m} \right] \\ K(h) &= K_s K_r(h) = K_s S_e^{1/2} \left[ 1 - \left( 1 - S_e \frac{1}{m} \right)^m \right]^2 \end{aligned} \right. \quad (9)$$

where  $\theta_r$  is the residual soil water content (L<sup>3</sup>L<sup>-3</sup>),  $\theta_s$  is the saturated soil water content (L<sup>3</sup>L<sup>-3</sup>),  $K_s$  is the saturated hydraulic conductivity (LT<sup>-1</sup>),  $K_r$  is the relative hydraulic conductivity (-),  $\alpha$  (L<sup>-1</sup>) and  $n$  (-) are shape factors,  $m = 1 - 1/n$ , and  $S_e$  is the normalized volumetric soil water content.

While the SALTMed model can consider subsurface drainage for both horizontally or vertically installed tile drains, this option is not used in this study. A more detailed description of the model is provided in Ragab et al. (2005, 2015) and Ragab (2015).

### 2.2.2. Data requirements

The main inputs of the SALTMED model include: (i) meteorological data, (ii) soil and crop properties, (iii) model parameters, (iv) and water and nutrient management data. These input data may be directly measured or may be obtained from the SALTMED database, which provides default values for more than 200 plant species and 40 different soil types.

The soil hydraulic parameters for the SALTMED model were discussed above. Since the SALTMED model requires the pore size distribution index  $\lambda$ , we estimated this parameter as  $\lambda = nm$  based on the fitted  $n$  and  $m$  in the van Genuchten (1980) model. Soil solute transport parameters were taken from Karandish and Šimůnek (2017).

Crop parameters, including the cropping calendar (i.e., sowing and harvesting dates, and duration of different growth stages), crop height, rooting depth, LAI values, crop yield, and  $HI$  (harvest index) were taken from field-based measurements. Crop coefficients ( $K_c$ ) were taken from Karandish and Šimůnek (2016a).  $K_e$  values were taken from the FAO-Irrigation and Drainage paper no 56 (Allen et al., 1998), and  $K_{cb}$  values were then estimated as  $K_{cb} = K_c - K_e$ . Crop growth parameters were taken from the model database, except for the harvest index (i.e., the  $HI$  values), which was directly measured in the field. The initial estimates of water uptake parameters were also taken from FAO-56 (Allen et al., 1998). These parameters were then fine-tuned during the calibration process, which is described in the following section. Water and nutrient management data, including the number and dates of irrigation events, irrigation water depths, irrigation water quality, the number and dates of fertilization events, fertilizers types, and fertilization rates were based on field measurement data.

### 2.2.3. Calibration and validation process

In the calibration process, the SALTMED model was first run using the initial measured/default values of soil and crop parameters. Thereafter, relevant model parameters (both soil and crop parameters) were adjusted to obtain the best agreement between measured and simulated data for the 2010 growing season, including crop yield, aboveground biomass, LAIs, soil water content, soil electrical conductivity, and soil  $\text{NO}_3^-$  content. The following parameters were fine-tuned during the calibration process using a trial-and-error approach: (i) crop parameters including  $K_e$ ,  $K_{cb}$ , a crop fraction cover ( $f_c$ ),  $\pi_{50}$ , and photosynthesis efficiency, and (ii) soil hydraulic parameters including  $K_s$ ,  $\theta_s$ , the pore size distribution index  $\lambda$ , and the air-entry value.

Data collected during the 2011 growing season for all treatments were then used to validate the SALTMED model. In the validation process, the SALTMED model was run with calibrated soil and crop parameters, while the accuracy of model predictions was evaluated for crop yield, aboveground biomass, LAIs, soil water content, soil electrical conductivity, and soil  $\text{NO}_3^-$  content.

### 2.3. The HYDRUS (2D/3D) model

The HYDRUS (2D/3D) model (Šimůnek et al., 2008, 2016) is a powerful numerical model that can simulate soil water and solute dynamics under various irrigation treatments and for different initial and boundary conditions. Karandish and Šimůnek (2016a, b, 2017, 2018) employed this model to simulate soil water and solute dynamics under different irrigation treatments during the 2010 and 2011 growing seasons. They provided detailed information on the modeling approach including the model description and governing equations, data requirements by the model, and how these data were collected during the current field investigation. Additionally, they provided details about model calibration and validation. Hence, detailed information about the HYDRUS modeling can be found in Karandish and Šimůnek (2016a, b, 2017, 2018).

### 2.4. Comparison of the two models

While the SALTMED and HYDRUS (2D/3D) models use similar equations for simulating water and solute transport in soils, they use different approaches to calculate the effects of the matric and osmotic stresses on root water uptake. SALTMED uses an additive function while HYDRUS (2D/3D) allows users to choose different options. While crop yield can only be obtained in HYDRUS as the ratio ( $RY$ ) of actual and potential crop evapotranspiration, it is expected to be described more accurately in SALTMED, which uses multiple crop parameters to simulate crop yield during the cropping cycle. As described in Section 2.2, there is an option in SALTMED to obtain actual crop yield based on crop growth parameters rather than based only on  $RY$ . The HYDRUS (2D/3D) model, on the other hand, cannot simulate the crop growth status and only simulates actual evaporation and transpiration. As a result, differences can be expected in crop yields and crop water consumptions simulated using the two models.

### 2.5. Criteria indices

The accuracy of both models was evaluated using selected criteria indices, including the normalized root mean square error ( $nRMSE$ ), the normalized mean bias error ( $nMBE$ ), and the relative error ( $RE$ ), as defined by the following equations:

$$nRMSE = \frac{\sqrt{\frac{(O_i - P_i)^2}{n}}}{\bar{O}_i} \quad (10)$$

$$nMBE = \frac{(O_i - P_i)}{\bar{O}_i} \quad (11)$$

$$RE = \frac{(P_i - O_i)}{O_i} \times 100\% \quad (12)$$

where  $P_i$  and  $O_i$  are predicted and observed data, respectively,  $\bar{O}_i$  is the average of the observed data, and  $n$  is the number of observations. We use the normalized criteria indices instead of the absolute indices to better evaluate the models performance. While the  $nRMSE$  reflects the model accuracy, the  $nMBE$  and  $RE$  characterize the bias provided by the SALTMED and/or HYDRUS (2D/3D) models.

### 2.6. WF accounting

The water footprint (WF) related to the crop production consists of two main components: the consumptive WF, including blue ( $WF_{blue}$ ) and green ( $WF_{green}$ ) WFs, and the degradative grey WF ( $WF_{grey}$ ). The  $WF_{blue}$  is estimated by dividing blue evapotranspiration ( $ET_{blue}$ ,  $\text{m}^3 \text{ha}^{-1}$ ) by crop yield ( $Y$ ,  $\text{t ha}^{-1}$ ), while the  $WF_{green}$  is calculated by dividing green evapotranspiration ( $ET_{green}$ ,  $\text{m}^3 \text{ha}^{-1}$ ) by  $Y$ :

$$\begin{cases} WF_{green} (\text{m}^3 \text{t}^{-1}) = \frac{ET_{green}}{Y} \\ WF_{blue} (\text{m}^3 \text{t}^{-1}) = \frac{ET_{blue}}{Y} \end{cases} \quad (13)$$

where  $ET_{blue}$  is a part of total evapotranspiration, which is supplied from blue water (i.e., blue water refers to water supplied to crops from surface and/or groundwater resources during the cropping cycle), and  $ET_{green}$  is a part of crop evapotranspiration, which is supplied from green water (i.e., green water refers to water supplied due to effective precipitation stored in the rooting zone during the cropping cycle). Crop evapotranspiration ( $ET$ ) is thus equal to  $ET_{blue} + ET_{green}$ .  $ET$  was estimated by the SALTMED and/or HYDRUS(2D/3D) models.

The following soil water balance was adopted to calculate  $ET_{blue}$  and  $ET_{green}$ :

$$S_{[t]} = S_{[t-1]} + P_{[t]} + I_{[t]} + CR_{[t]} - RO_{[t]} - ET_{[t]} - DP_{[t]} \quad (14)$$

where  $S_{[t]}$  and  $S_{[t-1]}$  are soil water storages at the end of days  $t$  and  $t-1$ ,

respectively,  $P_{[t]}$  is precipitation on day  $t$ ,  $I_{[t]}$  is irrigation on day  $t$ ,  $CR_{[t]}$  is capillary rise from groundwater,  $RO_{[t]}$  is surface runoff,  $ET_{[t]}$  is evapotranspiration, and  $DP_{[t]}$  is deep percolation. All terms are in mm. Following Allen et al. (1998), the capillary rise is set equal to zero since the groundwater table was more than one meter below the rooting zone during the entire cropping cycle of both years. For each day, the relative contributions of  $P$  and  $I$  to  $P+I$  were used to calculate the green and blue fractions of  $RO$ . The fractions of green and blue water in the soil water storage over time were calculated following Chukalla et al. (2015); Zhuo et al. (2016a), Karandish and Hoekstra (2017); Karandish et al. (2018). This method is based on the assumption that the storage of green water in the soil increases when rainfall infiltrates into the soil and that the storage of blue water increases when precipitation infiltrates. The fractions of green and blue water in the total soil water storage at the end of the previous day were used to calculate the fractions of green and blue  $ET$  and  $DP$  on day  $t$ .

The degradative grey  $WF$  ( $WF_{Grey}$ ,  $m^3 t^{-1}$ ) is the volume of freshwater required to assimilate the pollutant loads to freshwater bodies to the ambient water quality standard. The degradative grey  $WF$  ( $m^3 t^{-1}$ ), which is related to surplus N loads to water bodies, was estimated using the procedure introduced by Hoekstra et al. (2011):

$$WF_{Grey} (m^3 t^{-1}) = \frac{\alpha AR}{(C_{max} - C_{nat})Y} \tag{15}$$

where  $\alpha$  is the leaching-runoff fraction,  $AR$  is the chemical application rate to the agricultural soils ( $kg ha^{-1} y^{-1}$ ) (i.e.,  $\alpha AR$  is the pollutant load to freshwater bodies),  $C_{max}$  and  $C_{nat}$  are, respectively, the ambient water quality standard (i.e., the maximum allowable concentration in  $kg m^{-3}$ ) and its natural background concentration in a receiving body ( $kg m^{-3}$ ), and  $Y$  is crop yield ( $kg ha^{-1}$ ). A maximum acceptable N concentration of  $50 mg nitrate l^{-1}$  (or  $11.3 mg N l^{-1}$ ) was adopted in this study based on the EU Nitrates Directive (Monteny, 2001) and  $C_{nat}$  was set to  $1.5 mg l^{-1}$  (Mekonnen and Hoekstra, 2015).  $\alpha AR$  was estimated using either the HYDRUS (2D/3D) or SALTMED modeling, resulting in the model-simulated  $WF_{Grey}$ , or using field data, resulting in the measured  $WF_{Grey}$ . To calculate the measured grey  $WF$ ,  $\alpha AR$  for a specific treatment was set to residual N in the rooting zone at the end of the growing cycle (Frank et al., 2013). As described in Section 2.1, residual N at harvest was measured for all treatments and for both cropping cycles.

### 3. Results and discussion

First, we will discuss the capability of the two models (SALTMED first, followed by HYDRUS (2D/3D) (2D/3D)) to represent the collected experimental data. After the calibration and validation of the two models, we will use them to evaluate  $WF$  components for different treatments and to find out the best water-saving irrigation treatment for sustainable maize production in the study area (Table 1).

#### 3.1. The SALTMED model efficiency

##### 3.1.1. Soil water content

Based on the criteria indices presented in Table 2, the SALTMED model was capable of simulating SWCs during the calibration period with relatively high accuracy. Based on the  $nMBE$  values reported in Table 2, SWCs were underestimated by 0.9–14.2%. Except for the FI treatment, SWCs were better estimated for three top soil layers (i.e., 0–60 cm) than for the 60–80 cm soil depth. For the FI treatment, large differences between measured and simulated SWCs at the 60–80 cm soil depth may be explained by the fact that during individual irrigation events water infiltrated deeper into the soil than for the other water-saving irrigation treatments. In addition, more accurate results were obtained when simulating SWCs under the DI treatment, likely due to lower SWC variations as a result of limited irrigation and root water uptake

**Table 1**  
The measured soil and crop properties used in the SALTMED model.

Type	Parameter*	Growing season		
		2010	2011	
Crop properties	Sowing date	May 26	May 26	
	Harvest	September 9	September 12	
	Rooting depth	Maximum (cm)	80	80
		Minimum (cm)	15	15
	Potential crop yield ( $t ha^{-1}$ )**	7.0	6.6	
	Crop coefficient ( $K_c$ )***	Kc-ini	Ke = 0.32	Ke = 0.51
		Kc-mid	Kcb = 0.20	Kcb = 0.15
			Ke = 0.11	Ke = 0.11
		Kc-late	Kcb = 1.15	Kcb = 1.13
	Length of cropping cycle	initial stage	Ke = 0.26	Ke = 0.31
		developing stage	Kcb = 0.19	Kcb = 0.23
		mid-season stage	22	22
late-season stage		22	22	
		38	38	
		25	28	
Soil properties	The whole cropping cycle	107	110	
	Bulk density (gr cm3)	1.4	1.4	
	Soil texture	Sandy clay loam	Sandy clay loam	
	Maximum soil depth (cm)	80	80	
	Soil water content at saturation (%)	0.47	0.47	
	Water content at field capacity (%)	30	30	
	Water content at wilting point (%)	15	15	

\* All parameters reported in this Table are measured values.

\*\* Potential crop yield was determined for the FI treatment.

\*\*\*  $K_c$  values are set to those reported by Karandish and Šimunek (2016a).

During the validation period (i.e., the 2011 growing season),  $nRMSEs$  and  $nMBEs$  varied in the range of 0.7–5.8% and 1–11.5%, respectively, which is an indication that the SALTMED model can capture well both temporal and spatial variations of SWCs under different treatments. Such results are also supported by other researchers (e.g., Hassanli et al., 2016; Afzal et al., 2016; Ragab et al., 2015; Fghire et al., 2015; Rameshwaran et al., 2015; Pulvento et al., 2013, 2015a,b).

##### 3.1.2. Soil salinity and N content

The results of the quantitative assessment summarized in Table 2 indicate a good agreement between the observed and SALTMED-simulated soil salinities, expressed using the electrical conductivity of the soil solution ( $EC_{sw}$ ), both for the calibration and validation periods. Simulated  $EC_{sw}$  concentrations agreed well with observed values, with  $nRMSE = 2.4$ –11.3% and  $nMBE = 0.8$ –10.3% for the calibration period and  $nRMSE = 2.2$ –11.1% and  $nMBE = 1.4$ –7.0% for the validation period. A close match was also obtained between the observed and simulated soil  $NO_3^-$  contents for various treatments and different soil layers. Simulated soil  $NO_3^-$  contents agreed well with observed values, with  $nRMSEs$  ranging from 3.5 to 13.2% and 2.5–12.7% in 2010 and 2011, respectively, and  $nMBEs$  ranging from -9.9–11.5% and -3.8–11.7% in 2010 and 2011, respectively. Hence, the SALTMED model is capable of capturing the spatial and temporal trends in  $EC_{sw}$  and soil  $NO_3^-$  contents well.

##### 3.1.3. Crop N uptake

A comparison between the observed and model-simulated crop N uptake also indicates that reliable results were provided by the SALTMED model. Simulated crop N uptake was close to measured values, with  $nRMSEs$  ranging from 5.1 to 6.4% and 2.5–6.7% during the

**Table 2**

Criteria indices (*nRMSE*, *nMBE*) comparing the measured and SALTMED-simulated soil data during the calibration (the 2010 growing season) and validation (the 2011 growing season) periods for various irrigation treatments (FI, DI<sub>55</sub>, DI<sub>75</sub>, PRD<sub>55</sub>, and PRD<sub>75</sub>).

Period	Parameter	Depth	FI		PRD <sub>75</sub>		PRD <sub>55</sub>		DI <sub>75</sub>		DI <sub>55</sub>		
			<i>nRMSE</i> (%)	<i>nMBE</i> (%)	<i>nRMSE</i> (%)	<i>nMBE</i> (%)	<i>nRMSE</i> (%)	<i>nMBE</i> (%)	<i>nRMSE</i> (%)	<i>nMBE</i> (%)	<i>nRMSE</i> (%)	<i>nMBE</i> (%)	
Calibration period	Soil water content	0-20 cm	2.0	2.9	2.4	3.0	2.7	2.7	1.2	1.5	2.1	2.3	
		20-40 cm	1.9	2.7	2.1	2.6	2.3	2.4	1.1	1.5	1.8	2.3	
		40-60 cm	1.5	1.7	1.6	2.2	2.0	1.7	1.1	1.5	1.3	1.5	
		60-80 cm	0.5	0.9	5.2	14.2	13.1	12.3	3.7	5.9	4.9	6.9	
	Soil salinity*	0-20 cm	8.6	3.4	11.3	10.3	7.2	3.6	8.9	2.7	5.3	1.8	
		20-40 cm	4.0	1.5	5.1	4.5	3.0	1.5	3.7	1.2	2.5	0.8	
		40-60 cm	9.5	3.6	10.7	9.2	2.9	2.6	7.7	2.6	7.1	2.3	
		60-80 cm	7.4	2.7	6.7	6.0	2.4	2.1	7.3	2.4	5.0	1.6	
	Soil NO <sub>3</sub> content	0-20 cm	6.4	2.6	4.7	1.5	3.9	1.0	11.5	-9.9	4.9	2.4	
		20-40 cm	7.3	4.7	4.6	3.0	3.6	0.6	5.5	3.8	3.5	0.8	
		40-60 cm	5.1	-0.3	4.2	-2.4	5.7	5.2	13.2	11.5	8.0	7.2	
		60-80 cm	7.1	0.9	10.4	3.0	10.2	3.0	10.2	3.0	10.4	3.0	
	Validation period	Crop N uptake		6.1	-3.6	5.3	-3.4	6.4	-3.8	6.1	-3.2	5.1	-2.0
			Soil water content	0-20 cm	2.7	2.2	2.5	4.1	1.1	1.4	3.1	6.7	5.8
Soil salinity*		20-40 cm	0.8	2.6	2.1	2.5	2.0	2.3	0.9	1.4	1.2	1.4	
		40-60 cm	0.9	1.6	2.0	2.9	1.5	1.8	1.0	1.5	1.0	1.4	
		60-80 cm	0.7	1.3	1.9	2.1	1.2	1.5	0.8	1.0	1.3	1.7	
		0-20 cm	7.1	3.1	6.5	4.3	5.7	4.6	11.1	7.0	7.2	2.8	
Soil NO <sub>3</sub> content		20-40 cm	3.4	1.4	2.9	2.0	2.4	1.9	5.4	3.4	3.5	1.4	
		40-60 cm	8.2	3.5	5.9	4.0	3.0	2.6	10.9	6.7	9.6	3.8	
		60-80 cm	5.7	2.2	3.3	2.2	2.2	1.9	9.0	5.6	6.0	2.5	
		0-20 cm	4.1	1.8	5.3	2.0	2.5	-1.5	3.7	-2.7	3.8	-2.9	
Crop N uptake		20-40 cm	5.5	-0.3	7.0	4.5	4.6	-1.0	3.5	-0.3	4.5	-1.0	
		40-60 cm	9.2	-3.8	4.1	0.9	7.3	5.3	5.3	-2.2	9.7	7.6	
		60-80 cm	11.1	10.1	12.7	11.7	12.7	11.7	12.6	11.7	12.7	11.7	
			2.5	1.2	4.9	1.5	6.5	5.1	5.7	4.3	6.7	2.6	

2010 and 2011 cropping cycles, respectively. While crop N uptake was generally overestimated during the calibration period, with *nMBEs* ranging from -3.8% to -2%, it was generally underestimated during the validation period, with *nMBEs* ranging from 1.2% to 5.1%.

### 3.1.4. Aboveground biomass and LAI

In addition to simulating soil water and solute dynamics, a reliable description of the crop response to applied treatments is also important when applying the SALTMED model. Hence, we assessed the capability of the SALTMED model to capture temporal variations in the aboveground biomass (*DM*) and leaf area index (*LAI*) for various treatments during the 2010 (the calibration period) and 2011 (the validation period) growing seasons. Although SALTMED in general underestimated *DM* by 3–14% in 2010 and 4–14% in 2011, simulated *DM* was highly correlated with observed values, with  $R^2$  ranging from 0.96 to 0.99 (Fig. 2). With respect to the average bias evaluated over the whole cropping cycle, SALTMED simulated *DM* best for the PRD<sub>55</sub> treatment and worst for the FI treatment during both calibration and validation periods.

An inspection of the time-series of observed and model-simulated *LAI*s (Fig. 3) shows that *LAI* is usually underestimated by 3–10% during the 2010 growing season and by 2–18% in 2011. However, a visual inspection of scatter plots in Fig. 3, which compares the observed and SALTMED-simulated *LAI*s, clearly indicates the high potential of the SALTMED modeling. Notice the high values of  $R^2$  in Fig. 3 (i.e.,  $R^2 = 0.95$ – $0.99$ ). In general, better results were obtained for the PRD treatments when simulating temporal variations of *LAI*s. Nevertheless, the paired *t*-test analysis for the statistical comparison of the observed and SALTMED-simulated data demonstrated no significant difference between the observed and model-simulated *DM*s and *LAI*s, during the 2010 and 2011 cropping cycles.

### 3.1.5. Yield, total biomass, and maximum LAI

Table 3 shows the measured and SALTMED-simulated crop yield, total biomass, and maximum *LAI*, and the corresponding relative errors (*RE*) for different treatments in the 2010 and 2011 growing seasons.

With *RE*s ranging from 3.5 to 8.3% in 2010 and 3.6–7.9% in 2011, the SALTMED model is well capable of simulating maize crop yield. Hassani et al. (2016) reported *RE*s in the range of 0.9–24.7% when simulating maize crop yield under various water and saline stress treatments. *RE*s in our study are also within the range of those reported by Ragab et al. (2005) ( $|RE| = 0 - 21.5\%$ , with an average of 5.7%), by Razzaghi et al. (2011) for quinoa seed yield ( $|RE| = 0.8 - 2.2\%$ , with an average of 1.5%), by Kaya et al. (2015) for quinoa yield ( $|RE| = 1.2 - 12.6\%$ , with an average of 6.1%), and by Hirich et al. (2012) for simulating corn yield ( $|RE| = 0 - 29.1\%$ , with an average of 13.8%).

The SALTMED-simulated values underestimated measured total biomass at harvest by 5.7–12% and 4.3–10% in 2010 and 2011, respectively. The model performed better for the water stress treatments compared to the FI treatment. A close match was also obtained between the observed and model-simulated  $LAI_{max}$ , with  $|RE|$  ranging from 4.6 to 9.1% and 4–9% in the 2010 and 2011 growing seasons.

## 3.2. The HYDRUS (2D/3D) model efficiency

### 3.2.1. Soil water and solute dynamics

Based on the results reported in our previous papers (Karandish and Šimůnek, 2016a, b, 2017, 2018), and the *nRMSE* and *nMBE* values reported in Table 4, the HYDRUS (2D/3D) model capable of simulating soil water and solute dynamics, with *nRMSE* = 0.4–11.5% and *nMBE* = 0.7–12.5% for the soil water content, *nRMSE* = 1.8–10.9% and *nMBE* = -6.8–10% for the soil NO<sub>3</sub><sup>-</sup> content, *nRMSE* = 2.2–5.9% and *nMBE* = -3.1–4.5% for crop N uptake, and *nRMSE* = 2.1–9.1% and *nMBE* = 0.7–8.2% for soil  $EC_{sw}$ . Most earlier studies demonstrated the high capability of the HYDRUS (2D/3D) model to describe soil water and solute dynamics for various initial and boundary conditions (e.g., Cote et al., 2003; Gärdenäs et al., 2005; Assouline et al., 2006; Hanson et al., 2006; Ajdary et al., 2007; Crevoisier et al., 2008; Siyal and Skaggs, 2009; Mubarak, 2009; Li and Liu, 2011; Ramos et al., 2011, 2012; Tafteh and Sepaskhah, 2012; Phogat et al., 2013, 2014; Zeng et al., 2014; Mguidiche et al., 2015; Karandish and Šimůnek, 2016a,

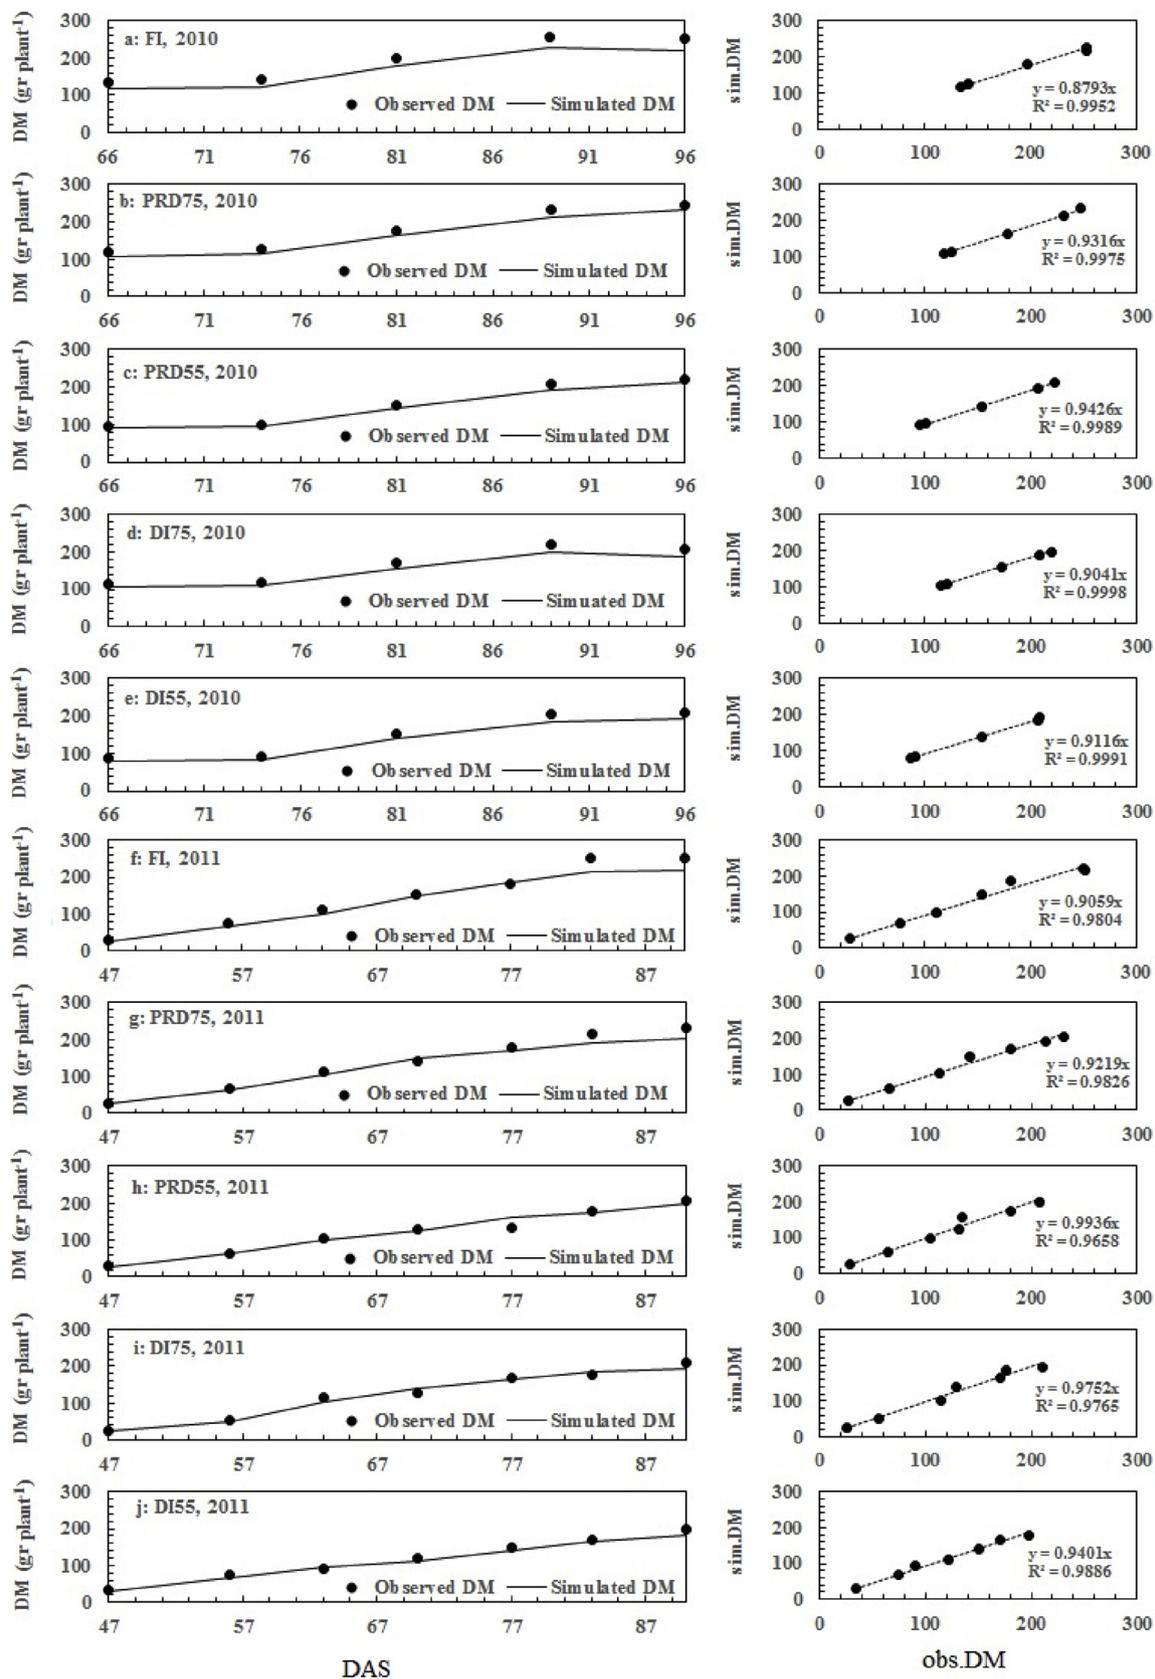


Fig. 2. Temporal variation of the observed and SALTMED-simulated aboveground biomass (DM, gr plant<sup>-1</sup>) for various treatments (FI, DI<sub>55</sub>, DI<sub>75</sub>, PRD<sub>55</sub>, and PRD<sub>75</sub>) during the calibration (i.e., the 2010 growing season) and validation (i.e., the 2011 growing season) period. DAP – days after planting.

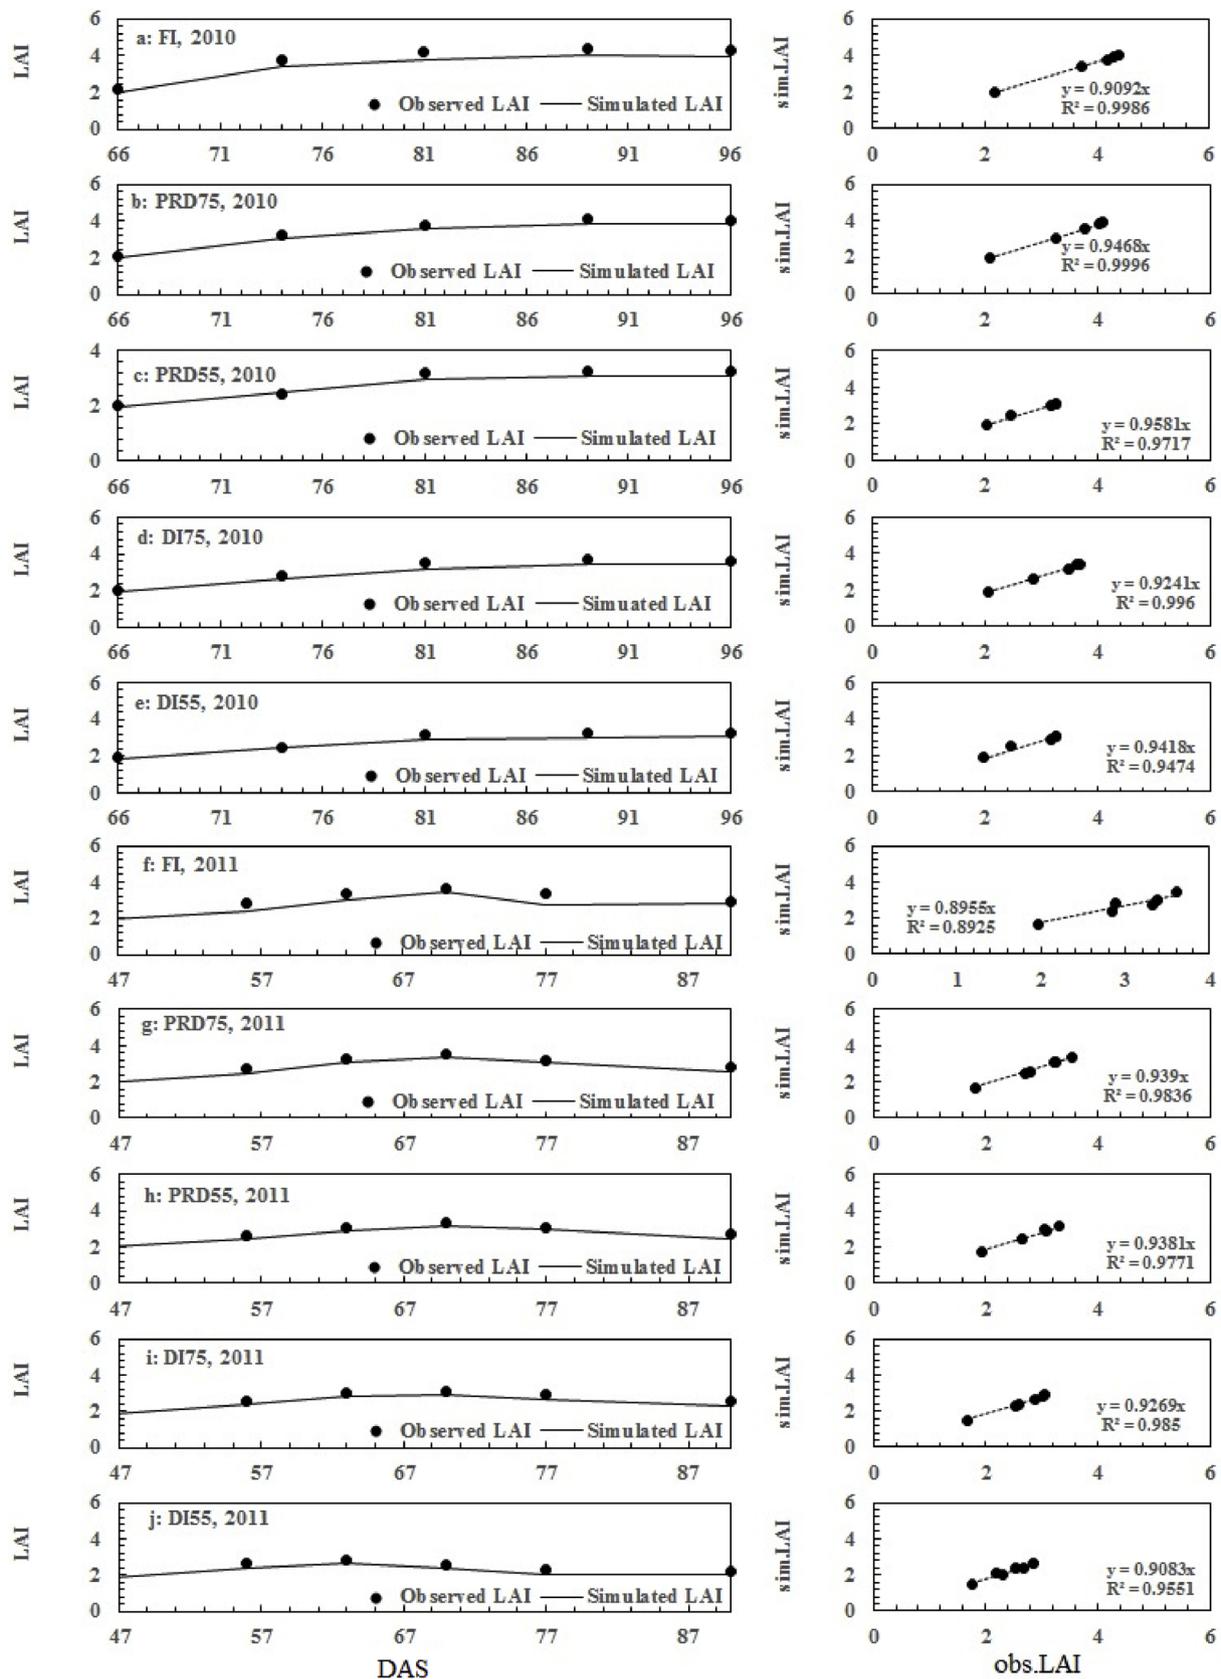


Fig. 3. Temporal variation of the observed and the SALTMED-simulated leaf area index (LAI) for various treatments (FI, DI<sub>55</sub>, DI<sub>75</sub>, PRD<sub>55</sub>, and PRD<sub>75</sub>) during the calibration (i.e., the 2010 growing season) and validation (i.e., the 2011 growing season) periods. DAP – days after planting.

**Table 3**

The observed and SALTMed-simulated crop yield, total biomass, and maximum leaf area index (LAI) for various treatments (FI, DI<sub>55</sub>, DI<sub>75</sub>, PRD<sub>55</sub>, and PRD<sub>75</sub>) in the 2010 and 2011 cropping cycles. RE – relative maximum error.

Year	Treatment	Crop yield (t ha <sup>-1</sup> )		RE (%)	Total biomass (t ha <sup>-1</sup> )		RE (%)	Maximum LAI		RE (%)
		Observed	Simulated		Observed	Simulated		Observed	Simulated	
2010	FI	7	6.4	-8.3	25.7	22.6	-12	4.4	4	-9.1
	PRD <sub>75</sub>	6.9	6.6	-4.2	21.8	20.1	-7.9	4.09	3.85	-6
	PRD <sub>55</sub>	3.3	3.2	-3.5	14.6	13.8	-5.7	3.27	3.12	-4.6
	DI <sub>75</sub>	5.8	5.4	-6.3	17.8	16.4	-7.6	3.68	3.42	-7
	DI <sub>55</sub>	3.2	3.0	-5.1	14	13.1	-6.3	3.26	3.07	-5.7
2011	FI	6.6	6.1	-7.9	19	17.1	-10	3.6	3.28	-9
	PRD <sub>75</sub>	6.2	6.0	-3.9	18.7	17.4	-6.8	3.54	3.35	-5.4
	PRD <sub>55</sub>	5.7	5.5	-3.6	16	15.3	-4.3	3.3	3.17	-4
	DI <sub>75</sub>	5.3	5.0	-5.5	16.5	15	-9.1	3.06	2.84	-7.3
	DI <sub>55</sub>	4.9	4.7	-4.9	15.2	14	-8.2	2.85	2.66	-6.6

2016b, 2017, 2018).

**Crop yield.** Since the HYDRUS (2D/3D) model doesn't simulate crop yield directly, we estimated crop yield based on the ratio of actual and potential evapotranspiration, since there is general belief among scientists that crop yield is linearly correlated with crop transpiration (Payero et al., 2006; Klocke et al., 2004; Stone, 2003). Table 5 shows the observed and HYDRUS (2D/3D)-simulated crop yields for different treatments, as well as the corresponding REs. Absolute REs (i.e., |RE|) range from 2.2 to 15.6% and 4.9–13.8% in 2010 and 2011, respectively.

3.3. The comparison of the models

The HYDRUS (2D/3D) model performed better than the SALTMed model when simulating soil water and solute dynamics under defined treatments, with 11.6–31.1% lower nRMSE and 11.7–31.7% lower nMBE when simulating soil water contents, 13.7–31.8% lower nRMSE and 14.3–34.3% lower nMBE when simulating soil NO<sub>3</sub><sup>-</sup> contents,

**Table 5**

The observed and HYDRUS-simulated crop yield and the corresponding relative errors (RE) for various treatments (FI, DI<sub>55</sub>, DI<sub>75</sub>, PRD<sub>55</sub>, and PRD<sub>75</sub>) in the 2010 and 2011 cropping cycles.

Year	Treatment	Crop yield (t ha <sup>-1</sup> )		RE (%)
		Observed	Simulated	
2010	FI	7	7.0	0.0
	PRD <sub>75</sub>	6.9	6.8	-2.2
	PRD <sub>55</sub>	3.3	3.8	15.2
	DI <sub>75</sub>	5.8	6.4	10.1
	DI <sub>55</sub>	3.2	3.7	15.6
2011	FI	6.6	6.6	0.0
	PRD <sub>75</sub>	6.2	6.5	5.4
	PRD <sub>55</sub>	5.7	5.4	-4.9
	DI <sub>75</sub>	5.3	6.0	13.8
	DI <sub>55</sub>	4.9	5.4	10.9

**Table 4**

Criteria indices (nRMSE, nMBE) comparing the measured and HYDRUS-simulated soil and crop data during the calibration (the 2010 growing season) and validation (the 2011 growing season) periods for various irrigation treatments (FI, DI<sub>55</sub>, DI<sub>75</sub>, PRD<sub>55</sub>, and PRD<sub>75</sub>).

Period	Parameter	Depth	FI		PRD <sub>75</sub>		PRD <sub>55</sub>		DI <sub>75</sub>		DI <sub>55</sub>	
			nRMSE (%)	nMBE (%)	nRMSE (%)	nMBE (%)	nRMSE (%)	nMBE (%)	nRMSE (%)	nMBE (%)	nRMSE (%)	nMBE (%)
Calibration period	Soil water content	0-20 cm	1.4	2.0	1.7	2.1	1.9	1.9	0.9	1.1	1.4	1.6
		20-40 cm	1.5	2.1	1.6	2.0	1.7	1.9	0.9	1.1	1.4	1.8
		40-60 cm	1.3	1.4	1.3	1.8	1.7	1.5	0.9	1.3	1.1	1.3
		60-80 cm	0.4	0.7	4.6	12.5	11.5	10.9	3.3	5.2	4.3	6.1
	Soil salinity*	0-20 cm	7.0	2.6	9.0	8.2	5.7	2.9	7.1	2.1	4.2	1.4
		20-40 cm	3.5	1.3	4.5	3.9	2.5	1.3	3.2	1.0	2.2	0.7
		40-60 cm	8.2	3.1	9.1	7.9	2.4	2.2	6.6	2.2	6.0	2.0
		60-80 cm	6.5	2.4	5.8	5.2	2.1	1.8	6.3	2.1	4.3	1.4
	Soil NO <sub>3</sub> content	0-20 cm	4.7	1.7	3.3	1.1	2.8	0.7	8.2	-6.8	3.4	1.7
		20-40 cm	5.5	3.4	3.4	2.2	2.7	0.4	4.2	2.8	2.6	0.6
		40-60 cm	4.2	-0.3	3.4	-1.9	4.6	4.2	10.8	9.3	6.5	5.9
		60-80 cm	6.0	0.8	8.6	2.5	8.6	2.5	8.6	2.5	8.6	2.5
Validation period	Crop N uptake		5.0	-3.0	4.3	-2.8	5.3	-3.1	5.1	-2.6	4.2	-1.7
		Soil water content	0-20 cm	2.0	1.5	1.8	3.0	0.8	1.0	2.3	4.8	4.2
	Soil salinity*	20-40 cm	0.6	2.0	1.6	2.0	1.6	1.8	0.7	1.1	0.9	1.1
		40-60 cm	0.8	1.3	1.6	2.4	1.3	1.5	0.9	1.2	0.8	1.2
		60-80 cm	0.6	1.1	1.6	1.8	1.0	1.3	0.7	0.9	1.1	1.5
		0-20 cm	5.6	2.2	4.9	3.3	4.3	3.4	8.6	5.2	5.3	2.1
	Soil NO <sub>3</sub> content	20-40 cm	2.8	1.1	2.3	1.6	1.9	1.5	4.2	2.5	2.7	1.1
		40-60 cm	6.6	2.7	4.6	3.1	2.3	2.1	8.6	5.2	7.5	3.0
		60-80 cm	5.2	2.0	2.9	2.1	2.0	1.7	8.3	5.0	5.5	2.2
		0-20 cm	3.0	1.2	3.6	1.5	1.8	-1.1	2.7	-1.8	2.6	-2.1
	Crop N uptake	20-40 cm	4.2	-0.2	5.1	3.4	3.4	-0.7	2.6	-0.2	3.2	-0.7
		40-60 cm	7.1	-2.8	3.1	0.7	5.5	4.0	4.1	-1.6	7.3	5.7
60-80 cm		9.5	8.6	10.9	10.0	10.8	10.0	10.8	10.0	10.8	10.0	
		2.2	1.0	4.3	1.3	5.7	4.5	5.1	3.8	5.9	2.3	

**Table 6**

Field-based calculated and model-simulated consumptive WF and degradative grey WF for various treatments in 2010 and 2011 cropping cycles.

Year	Treatment	HYDRUS (2D/3D)				SALTMED				Field-based
		Crop yield (t ha <sup>-1</sup> )	ET <sub>a</sub> (mm)	Consumptive WF (m <sup>3</sup> t <sup>-1</sup> )	Grey WF (m <sup>3</sup> t <sup>-1</sup> )	Crop yield (t ha <sup>-1</sup> )	ET <sub>a</sub> (mm)	Consumptive WF (m <sup>3</sup> t <sup>-1</sup> )	Grey WF (m <sup>3</sup> t <sup>-1</sup> )	Grey WF (m <sup>3</sup> t <sup>-1</sup> )
2010	FI	7	650.3	929	398	6.4	604.4	942	453	321
	PRD <sub>75</sub>	6.8	627.2	926	466	6.6	616.1	932	492	385
	PRD <sub>55</sub>	3.8	535.9	1411	1339	3.2	462.1	1451	1631	1391
	DI <sub>75</sub>	6.4	593.2	929	691	5.4	518.1	953	830	686
	DI <sub>55</sub>	3.7	531.5	1438	1529	3	450.5	1483	1880	1690
2011	FI	6.6	572.5	871	296	6.1	534	879	388	325
	PRD <sub>75</sub>	6.5	566.7	871	357	6	524.3	880	472	411
	PRD <sub>55</sub>	5.4	470.3	872	1110	5.5	475.7	866	1339	1164
	DI <sub>75</sub>	6	523.3	873	950	5	447.8	894	1362	1174
	DI <sub>55</sub>	5.4	471.2	870	1518	4.7	414.2	889	1883	1728

10.8–17.8% lower *nRMSE* and 11.0–18.0% lower *nMBE* when simulating crop N uptake, and 6.7–25.5% lower *nRMSE* and 7.7–28.1% lower *nMBE* when simulating soil  $EC_{sw}$ . Such differences may originate from the fact that the HYDRUS (2D/3D) and SALTMED models use different types of boundary conditions for water flow and solute transport.

However, the SALTMED-simulated yields are more accurate compared to those simulated by HYDRUS. The  $|RE|$  obtained by the HYDRUS (2D/3D) model were generally 1.3–11.7% higher compared to those obtained by the SALTMED model, except for the PRD<sub>75</sub> treatment in 2010, for which the  $|RE|$  by the HYDRUS (2D/3D) model was 2% smaller than that obtained by the SALTMED model. Better performance of the SALTMED model in simulating crop yield is related to the embedded driving equations and formulas for estimating crop yield (Hassanli et al., 2016; Oster et al., 2012). In fact, yield estimations based on the crop growth parameters rather than *RY* provided better results for the SATMED-simulated yields.

### 3.4. WF accounting

Table 6 shows the consumptive and degradative grey WFs estimated using the results of the HYDRUS (2D/3D) and SALTMED models for various treatments in 2010 and 2011. The HYDRUS (2D/3D)-estimated consumptive WFs are 0.3–3.2% lower than those estimated by the SALTMED model. The consumptive WF is influenced by the yield and crop water consumption (Karandish and Hoekstra, 2017; Karandish and Šimůnek, 2018). Any increase in crop yield and/or reduction in crop water consumption may reduce the consumptive WF related to crop production. Table 6 indicates that compared to the SALTMED predictions, HYDRUS (2D/3D) simulated a lower crop yield reduction than the reduction in the crop water consumption, which resulted in lower consumptive WFs. Crop yield and water consumption estimated by HYDRUS (2D/3D) are 3–23.3% and 1.8–18% lower, respectively, than those estimated by SALTMED.

The HYDRUS (2D/3D)-estimated grey WFs were 5.3–30.2% lower than those estimated using SALTMED, which may be associated with the higher HYDRUS (2D/3D)-estimated yield (Table 5). Table 6 also shows that the HYDRUS (2D/3D)-estimated grey WFs provided a closer match to those calculated based on field measurements. While for HYDRUS (2D/3D),  $|RE|$  ranged from 0.7 to 24.2%, for SALTMED it ranged from 8.9 to 41.2%. Such results may be associated with a better estimation of crop N uptake, and consequently, soil N residual at harvest by the HYDRUS (2D/3D) model (Table 4).

Except for the PRD<sub>55</sub> and DI<sub>55</sub> in 2010, no considerable differences were observed in estimated consumptive WFs for various treatments. In the absence of the water stress,  $906.5 \pm 35.5$  m<sup>3</sup> of water is required to produce a unit (ton) of maize in the study area. Applying water stress may produce a relative change of -0.3%–54.7% in the estimated consumptive WF, with a particular increase under PRD<sub>55</sub> and DI<sub>55</sub> in 2010.

Such an increase is mainly due to a significant reduction in crop yield under the PRD<sub>55</sub> and DI<sub>55</sub> treatments in 2010 rather than the associated reduction in the crop water consumption. Nearly similar consumptive WFs estimated for the other treatments may be justified by the fact that the negative consequences of reduced yield under the water stress are compensated by the positive consequences of the reduced crop water consumption.

Based on the estimated grey WF, which is an indicator of adverse environmental effects of human activities and water quality management, the PRD application may be safer than DI when water resources are limited in the study area. A unit of maize under PRD<sub>75</sub> and PRD<sub>55</sub> is produced with 32.6–65.3% and 12.4–32.7% fewer pollutant loads to freshwater bodies than under DI<sub>75</sub> and DI<sub>55</sub>, respectively. The smallest grey WFs can always be found under FI, followed by PRD<sub>75</sub>. The grey WF under PRD<sub>75</sub> was slightly higher than under the FI treatment, accounting for 8.6–26.7%, which may be attributed to lower yield and N water uptake under PRD<sub>75</sub>. Nevertheless, the PRD<sub>75</sub> treatment seems to be the safest water-saving irrigation strategy in the study area, since the estimated grey WF for PRD<sub>75</sub> was 17.1–77.2% lower than those estimated for the other water-saving irrigation treatments.

## 4. Conclusions

Using data collected during a two-year field investigation in a surface drip-irrigated maize field, we compared the performance of the SALTMED and HYDRUS (2D/3D) models in simulating water and solute dynamics, maize growth, and maize consumptive and degradative WFs under various water-saving irrigation strategies, including full irrigation (FI), partial root-zone drying (PRD), and deficit irrigation (DI). The consumptive and degradative WFs estimated by HYDRUS (2D/3D) were 0.6–3% and 5.3–30.2%, respectively, lower than those estimated by the SALTMED model. However, the grey WFs simulated by HYDRUS (2D/3D) were in better agreement with those estimated using the field-collected data, particularly due to the more accurate estimation of soil N dynamics. While the gross blue water consumption is 25 or 45% lower for considered water-saving irrigation strategies (DI<sub>75</sub> and PRD<sub>75</sub> or DI<sub>50</sub> and PRD<sub>50</sub>, respectively), the corresponding reduction in maize grain yield under the water stress resulted in insignificant differences in the estimated maize consumptive WFs among various treatments. Regarding the grey WF, which is an indicator of the negative environmental impact of human activities and water quality management, PRD<sub>75</sub> produced better results than the other water-saving irrigation treatments, suggesting that sustainable agriculture may be easier achieved under PRD<sub>75</sub>. Reliable estimates of both consumptive and degradative grey WFs related to the maize production for various treatments by the HYDRUS (2D/3D) and SALTMED models indicate that there is an alternative approach to the labor- and time-consuming field investigations. Nevertheless, more accurate results are expected to be achieved when employing the HYDRUS (2D/3D) model.

## Acknowledgment

Fatemeh Karandish would like to appreciate the support of University of Zabol for carrying out this research under the grant number 'UOZ\_GR\_9618\_4'.

## References

- Abdelraouf, R.E., Ragab, R., 2018. Applying partial root drying irrigation in the presence of organic mulching: is that the best irrigation practice for arid regions? Field and modelling study using the SALTMED model. *Irrig. Drain.* <https://doi.org/10.1002/ird.2249>.
- Afzal, M., Solimando, D., Ragab, R., 2016. Improving water resources management using different irrigation strategies and water qualities: field and modelling study. *Agr. Water Manage.* 176, 40–54.
- Ajdary, K., Singh, D.K., Singh, A.K., Khanna, M., 2007. Modelling of nitrogen leaching from experimental onion field under drip fertigation. *Agr. Water Manage.* 89, 15–28.
- Allen, R.G., Pereira, L.S., Raes, D., Smith, M., 1998. Crop evapotranspiration guide lines for computing crop water requirements. *Irrigation and Drainage Paper 56*, Rome, Italy. pp. 300.
- AQUASTAT, 2016. Food and Agriculture Organization of the United Nations, Rome, Italy. <http://www.fao.org/faostat/en/>.
- Assouline, S., Moller, M., Cohen, S., Ben-Hur, M., Grava, A., Narkis, K., Silber, A., 2006. Soil-plant system response to pulsed drip irrigation and salinity: bell pepper-Case study. *Soil Sci. Soc. Am. J.* 70, 1556–1568.
- Cardon, E.G., Letey, J., 1992. Plant water uptake terms evaluated for soil water and solute movement models. *Soil Sci. Soc. Am. J.* 56, 1876–1880.
- Chukalla, A.D., Kroll, M.S., Hoekstra, A.Y., 2017. Grey water footprint reduction in irrigated crop production: effect 1 of nitrogen application rate, nitrogen form, tillage practice and irrigation strategy. *Hydrol. Earth Syst. Sci. Discuss.* 2017. <https://doi.org/10.5194/hess-2017-224>.
- Chukalla, A.D., Krol, A.S., Hoekstra, A.Y., 2018. Trade-off between blue and grey water footprint of crop production at different nitrogen application rates under various field management practices. *Sci. Total Environ.* 626 (2018), 962–970.
- Chukalla, A.D., Krol, M.S., Hoekstra, A.Y., 2015. Green and blue water footprint reduction in irrigated agriculture: effect of irrigation techniques, irrigation strategies and mulching. *Hydrol. Earth Syst. Sci. Discuss.* 19 (12), 4877–4891.
- Cote, C.M., Bristow, K.L., Charlesworth, P.B., Cook, F.J., Thorburn, P.J., 2003. Analysis of soil wetting and solute transport in subsurface trickle irrigation. *Irrig. Sci.* 22, 143–156.
- Crevoisier, D., Popova, Z., Mailhol, J.C., Ruelle, P., 2008. Assessment and simulation of water and nitrogen transfer under furrow irrigation. *Agr. Water Manage.* 95 (4), 354–366.
- Dry, P.R., Loveys, B.R., Doring, H., 2000. Partial drying of the rootzone of grape. 2. Changes in the patterns of root development. *Vitis* 39, 9–12.
- Fghire, R., Wahbi, S., Anaya, F., Issa Ali, O., Benlhabib, O., Ragab, R., 2015. Response of quinoa to different water management strategies: field experiments and SALTMED model application results. *Irrig. Drain.* 64, 29–40.
- Gärdenäs, A.I., Hopmans, J.W., Hanson, B.R., Šimůnek, J., 2005. Two-dimensional modeling of nitrate leaching for various fertigation scenarios under micro-irrigation. *Agr. Water Manage.* 74 (3), 219–242.
- Hanson, B.R., Šimůnek, J., Hopmans, J.W., 2006. Evaluation of urea-ammonium-nitrate fertigation with drip irrigation using numerical modeling. *Agr. Water Manage.* 86, 102–113.
- Hassanli, M., Ebrahimian, H., Mohammadi, E., Rahimi, A., Shokouhi, A., 2016. Simulating maize yields when irrigating with saline water, using the AquaCrop, SALTMED, and SWAP models. *Agr. Water Manage.* 176, 91–99.
- Hillel, D., 1977. Computer Simulation of Soil-water Dynamics; a Compendium of Recent Work. IDRC, Ottawa.
- Hirich, A., Chouk-Allah, R., Ragab, R., Jacobsen, S.-E., L-youssfi, E.L., El-omari, H., 2012. The SALTMED model calibration and validation using field data from Morocco. *J. Mater. Environ. Sci.* 3 (2), 342–359.
- Hoekstra, A.Y., 2017. Water footprint assessment: evolution of a new research field. *Water Resour. Manag.* 31, 3061–3081.
- Hoekstra, A.Y., 2013. *The Water Footprint of Modern Consumer Society*. Routledge, London, UK.
- Hoekstra, A.Y., Chapagain, A.K., Aldaya, M.M., Mekonnen, M.M., 2011. *The Water Footprint Assessment Manual: Setting the Global Standard*. Earthscan, London, UK.
- Kang, S., Zhang, J., 2004. Controlled alternate partial root- Zone irrigation: its physiological consequences and impact on water use efficiency. *J. Exp. Bot.* 55, 2437–2446.
- Karandish, F., Hoekstra, A.Y., 2017. Informing national food and water security policy through water footprint assessment: the case of Iran. *Water* 9 (11), 25. <https://doi.org/10.3390/w9110831>. 831.
- Karandish, F., Šimůnek, J., 2016a. A field-modeling study for assessing temporal variations of soil-water-crop interactions under water-saving irrigation strategies. *Agr. Water Manage.* 178, 291–303. <https://doi.org/10.1016/j.agwat.2016.10.009>.
- Karandish, F., Šimůnek, J., 2016b. Numerical and machine-learning modeling of soil water content for sustainable water management in agriculture under water stress. *J. Hydrol. (Amst)* 543, 892–909. <https://doi.org/10.1016/j.jhydrol.2016.11.007>.
- Karandish, F., Šimůnek, J., 2017. Two-dimensional modeling of nitrogen and water dynamics for various N-managed water-saving irrigation strategies using HYDRUS. *Agr. Water Manage.* 193, 174–190. <https://doi.org/10.1016/j.agwat.2017.07.023>. 2017.
- Karandish, F., Šimůnek, J., 2018. An application of the water footprint assessment to optimize production of crops irrigated with saline water: a scenario assessment with HYDRUS. *Agr. Water Manage.* 208 (30), 67–82. <https://doi.org/10.1016/j.agwat.2018.06.010>.
- Kaya, Ç.I., Yazar, A., Sezen, S., 2015. SALTMED model performance on simulation of soil moisture and crop yield for quinoa irrigated using different irrigation systems, irrigation strategies and water qualities in Turkey. *Agr. Agric. Sci. Proced* 4, 108–118.
- Kirda, C., Cetin, M., Dasgan, Y., Topcu, S., Kaman, H., Ekici, B., Derici, M.R., Ozguven, A.L., 2004. Yield response of greenhouse grown tomato to partial root drying and conventional deficit irrigation. *Agr. Water Manage.* 69, 191–201.
- Klocke, N.L., Schneekloth, J.P., Melvin, S., Clark, R.T., Payero, J.O., 2004. Field scale limited irrigation scenarios for water policy strategies. *Appl. Eng. Agric.* 20, 623–631.
- Lee, S.H., Yoo, S.H., Choi, J.Y., Mohtar, R.H., 2017. Evaluation of external virtual water export and dependency through crop trade: an Asian case study. *Paddy Water Environ.* 15 (3), 525–539.
- Li, J., Liu, Y., 2011. Water and nitrate distributions as affected by layered-textural soil and buried dripline depth under subsurface drip fertigation. *Irrig. Sci.* 29, 469–478.
- Mekonnen, M.M., Hoekstra, A.Y., 2015. Global gray water footprint and water pollution levels related to anthropogenic nitrogen loads to fresh water. *Environ. Sci. Technol.* 49 (21), 12860–12868.
- Mekonnen, M.M., Hoekstra, A.Y., 2016. Global gray water footprint and water pollution levels related to anthropogenic nitrogen loads to fresh water. *Environ. Sci. Technol.* 49, 12860–12868.
- Mekonnen, M.M., Hoekstra, A.Y., 2014. Water footprint benchmarks for crop production: a first global assessment. *Ecol. Indic.* 46, 214–223.
- Mguidiche, A., Provenzano, G., Douh, B., Khila, S., Rallo, G., Boujelben, A., 2015. Assessing HYDRUS-2D to simulate soil water content (SWC) and salt accumulation under an SDI-system: application to potato crop in a semi-arid area of central Tunisia. *Irrig. Drain.* <https://doi.org/10.1002/ird.1884>.
- Monteny, G.J., 2001. The EU Nitrates Directive: a European approach to combat water pollution from agriculture. *Sci. Wold. J.* 1, 927–935.
- Mubarak, I., 2009. Effect of temporal variability in soil hydraulic properties on simulated water transfer under high-frequency drip irrigation. *Agr. Water Manage.* 96 (11), 1547–1559.
- Oster, J.D., Letey, J., Vaughan, P., Wu, L., Qadir, M., 2012. Comparison of transient-state models that include salinity and matric stress effects on plant yield. *Agr. Water Manage.* 103, 167–175.
- Payero, J.O., Melvin, S.R., Irmak, S., Tarkalson, D., 2006. Yield response of corn to deficit irrigation in a semiarid climate. *Agr. Water Manage.* 84, 101–112.
- Phogat, V., Skewes, M.A., Cox, J.W., Alam, J., Grigson, G., Šimůnek, J., 2013. Evaluation of water movement and nitrate dynamics in a lysimeter planted with an orange tree. *Agr. Water Manage.* 127 (2013), 74–84.
- Phogat, V., Skewes, M.A., Cox, J.W., Sanderson, G., Alam, J., Šimůnek, J., 2014. Seasonal simulation of water, salinity and nitrate dynamics under drip irrigated mandarin (*Citrus reticulata*) and assessing management options for drainage and nitrate leaching. *J. Hydrol. (Amst)* 513, 504–516.
- Pulvento, C., Ariccardi, M., Lavini, A., D'andria, R., Ragab, R., 2015a. Parameterization and field validation of SALTMED Model for grain amaranth in South Italy. *Irrig. Drain.* 64, 59–68.
- Pulvento, C., Lavini, A., Riccardi, M., D'andria, R., Ragab, R., 2015b. Assessing amaranth adaptability in a mediterranean area of south Italy under different climatic scenarios. *Irrig. Drain.* 64, 50–58.
- Pulvento, C., Riccardi, M., Lavini, A., D'andria, R., Ragab, R., 2013. SALTMED model to simulate yield and dry matter for quinoa crop and soil moisture content under different irrigation strategies in south Italy. *Irrig. Drain.* 62, 229–238.
- Ragab, R., Malash, N., Abdel-Gawad, G., Arsalan, A., Ghaibeh, A., 2005. A holistic generic integrated approach for irrigation: crop and field management 2 - The SALTMED model validation using field data of five growing seasons from Egypt and Syria. *Agr. Water Manage.* 78, 89–107.
- Ragab, R., 2015. Integrated management tool for water, crop, soil and N-Fertilizers: the SALTMED model. *Irrig. Drain.* 64, 1–12.
- Ragab, R., Battilani, A., Matovic, G., Stikic, R., Psarras, G., Chartzoulakis, K., 2015. SALTMED model as an integrated management tool for water, crop, soil and N-fertilizer water management strategies and productivity: field and simulation study. *Irrig. Drain.* 64, 13–28.
- Rameshwaran, P., Tepe, A., Ragab, R., 2015. The effect of saline irrigation water on the yield of pepper: experimental and modelling study. *Irrig. Drain.* 64, 41–49.
- Ramos, T.B., Šimůnek, J., Gonçalves, M.C., Martins, J.C., Prazeres, A., Castanheira, N.L., Pereira, L.S., 2011. Field evaluation of a multicomponent solute transport model in soils irrigated with saline waters. *J. Hydrol. (Amst)* 407, 129–144. <https://doi.org/10.1016/j.jhydrol.2011.07.016>.
- Ramos, T.B., Šimůnek, J., Gonçalves, M.C., Martins, J.C., Prazeres, A., Pereira, L.S., 2012. Two-dimensional modeling of water and nitrogen fate from sweet sorghum irrigated with fresh and blended saline waters. *Agr. Water Manage.* 111, 87–104.
- Razzaghi, F., Plauborg, F., Ahmadi, S.H., Jacobsen, S.-E., Anderson, M.N., Ragab, R., 2011. Simulation of quinoa (*chenopodium quinoa* wild.) Response to soil salinity using the SALTMED model. ICID 21st International Congress on Irrigation and Drainage 15–23 October 2011.
- Shao, G.C., Zhang, Z.Y., Liu, N., Yu, S.E., Xing, W.G., 2008. Comparative effects of deficit irrigation (DI) and partial rootzone drying (PRD) on soil water distribution, water use, growth and yield in greenhouse grown hot pepper. *Sci. Hortic.* 119 (1), 11–16.
- Šimůnek, J., van Genuchten, M.Th., Šejna, M., 2008. Development and applications of the HYDRUS and STANMOD software packages and related codes. *Vadose Zone J.* 7 (2), 587–600. <https://doi.org/10.2136/vzj2007.0077>.
- Šimůnek, J., van Genuchten, M.Th., Šejna, M., 2016. Recent developments and applications of the HYDRUS computer software packages. *Vadose Zone J.* 15 (7), 25. <https://doi.org/10.2136/vzj2016.04.0033>.

- Siyal, A.A., Skaggs, T.H., 2009. Measured and simulated soil wetting patterns under porous clay pipe sub-surface irrigation. *Agr. water manage* 96 (6), 893–904.
- Stone, L.R., 2003. Crop water use requirements and water use efficiencies. *Proceedings of the 15th Annual Central Plains Irrigation Conference and Exposition*, Colby 127–133.
- Tafteh, A., Sepaskhah, A.R., 2012. Application of HYDRUS-1D model for simulating water and nitrate leaching from continuous and alternate furrow irrigated rapeseed and maize fields. *Agr. Water Manage* 113, 19–29.
- Tang, L.S., Li, Y., Zhang, J., 2005. Physiological and yield responses of cotton under partial root-zone irrigation. *Field Crop Res* 94, 214–223.
- Yao, C., Teng, Y., Huang, L., 2017. Evaluation index system construction and empirical analysis on food security in China. *Trans. Chin. Soc. Agric. Eng* 31, 1–10.
- Yoo, S.H., Choi, J.Y., Lee, S.H., Kim, T., 2016a. Estimating water footprint of paddy rice in Korea. *Paddy. Water. Environ* 12 (1), 43–54.
- Yoo, S.H., Lee, S.H., Choi, J.Y., Bin, J., 2016b. Estimation of potential water requirements using water footprint for the target of food self-sufficiency in South Korea. *Paddy. Water. Environ* 14 (1), 259–269.
- Zeng, W., Xu, C., Wu, J., Huang, J., 2014. Soil salt leaching under different irrigation regimes: HYDRUS-1D modelling and analysis. *J. Arid Land* 6 (1), 44–58.
- Zhuo, L., Mekonnen, M.M., Hoekstra, A.Y., 2016b. Benchmark levels for the consumptive water footprint of crop production for different environmental conditions: a case study for winter wheat in China. *Hydrol. Earth Syst. Sci. Discuss.* 20 (11), 4547–4559.
- Zhuo, L., Mekonnen, M.M., Hoekstra, A.Y., Wada, Y., 2016a. Inter- and intra-annual variation of water footprint of crops and blue water scarcity in the Yellow River Basin (1961–2009). *Adv. Water Resour.* 87, 21–41.